

## Predicting the Flexural Strength of Concretes Made with Granite from Eastern Nigeria Using Multi-Layer Perceptron Networks

Chidozie Chukwuemeka Nwobi-Okoye<sup>1</sup> and Ikechukwu EtienneUmeonyiagu<sup>2</sup>

<sup>1</sup>Anambra State University, Uli, Nigeria

<sup>2</sup>Department of Civil Engineering, Anambra State University, Uli, Nigeria.

### Abstract

*Of recent, Nigeria has experienced high frequency of collapsed buildings. In most of these cases the cause of the collapse could be traced to the strength of the construction materials, mainly concrete. Secondly, experimental determination of the strength of concrete materials used in buildings and structures is quite expensive and time consuming. This research seeks to develop a computational model based on artificial neural networks for the determination of the flexural strength of concrete materials made from a prevalent coarse aggregate component from Nigeria. The work involved building a multilayer perceptron neural network model which was trained using experimental data obtained from flexural strength test of concrete made from granite. The flexural strength predictions were compared with predictions from an alternative model based on regression analysis. The results of the study show that for the granite based concrete, the regression model prediction has a correlation coefficient of 0.98222 and a sum of squares error of 0.133534, while the neural network model prediction has a correlation coefficient of 0.98227 and a sum of squares error of 0.010914. Generally, the models predicted well, but the neural network model predicted slightly better than the regression model. This especially confirms the utility of artificial neural network as a very good substitute to costly and time consuming experiments to predict material properties.*

**Keywords:** Artificial Neural Network; Concrete; granite; Regression; Modelling.

### Nomenclature, Symbols and Notations

$z_1$  = water/cement ratio

$z_2$  = water

$z_3$  = fine aggregate

$z_4$  = coarse aggregate

$X_1$  = fine aggregate

$X_2$  = coarse aggregate

$X_3$  = cement

$X_4$  = water

$Y$  = experimentally determined strength

$\hat{Y}$  = network prediction

W=neural network input weight

g=network activation function

$a_i$  = neural network input activations

$h_W$  = network weighting function

t = time

## 1.0 Introduction

Strength being the most important property of concrete determines the quality of concrete. Traditionally, laboratory trial

Corresponding author: Chidozie Chukwuemeka Nwobi-Okoye, E-mail: chidozien@yahoo.com, Tel.: +2348060013240

mixes have been used to determine the flexural strengths of concrete. Experimental determination of the strength characteristics of concrete materials is costly and time consuming. Often building contractors in Nigeria in their attempt to cut corners use low quality concrete materials in building constructions leading to cracking and in some cases total collapse of the building or structure. Here in Nigeria cases of collapsed buildings and structures are prevalent, and often lead to massive loss of lives and properties [1, 2]. Olujumoke et al. [1] identified weak concrete mixes as one of the major reasons for the collapse of most buildings in Nigeria. This has disastrous socio-economic consequences for the country [1, 2].

Building structures with the right materials and proper strength characteristics would eliminate the incidences of collapsed buildings and structures in Nigeria. This will improve the socio-economic well-being of the citizens. Finding a potable low cost way of predicting the strength of concrete materials would help in solving the problem of collapsed buildings and structures in Nigeria. One way this could be done is by developing a computational model based on artificial neural network technology for predicting the strength of concrete materials. With mathematical and computational models a designer can easily find the best combination of constituent material to balance strength and cost.

An artificial neural network (ANN), usually called "neural network" (NN), is a mathematical model or computational model that is inspired by the structure and/or functional aspects of biological neural networks[3].

The concept of artificial neurons was first introduced in 1943 [4]. Russell and Norvig [3] stated that since 1943 when McCulloch and Pitts introduced the concept of neurons, much more detailed and realistic models have been developed both for neurons and for larger systems in the brain leading to the modern field of computational neuroscience. Since the work of McCulloch and Pitts in 1943, ANN has had wide application in many spheres of life. According to Maier and Dandy [5], in recent years, Artificial Neural Networks (ANNs) have become extremely popular for prediction and forecasting in a number of areas, including finance, power generation, medicine, water resources and environmental science.

The utility of artificial neural network models lies in the fact that they can be used to infer a function from observations. This is particularly useful in applications where the complexity of the data or task makes the design of such a function by hand impractical [3].

The tasks to which artificial neural networks are applied tend to fall within the following broad categories:

- i. Function approximation, or regression analysis, including time series prediction, fitness approximation and modelling.
- ii. Classification, including pattern and sequence recognition, novelty detection and sequential decision making.
- iii. Data processing, including filtering, clustering, blind source separation and compression.
- iv. Robotics, including directing manipulators, Computer numerical control.

Many papers have been written on the application of ANNs to the prediction of strength of engineering materials. Mukherjee and Biswas [6] in their paper applied artificial neural networks to the prediction of the mechanical behaviour of concrete materials at high temperature. Their results were very encouraging. Oretal and Kawashima [7] in their paper proposed an artificial neural network (ANN) based model, to predict the confined flexural strength and corresponding strain of circular concrete columns. Their study shows the importance of validating the ANN models in simulating physical processes especially when data are limited. The ANN model they developed was also compared to some analytical models and was found to perform well. Other papers on the prediction of concrete strength using neural networks include: Lee [8], Kasperkiewicz et al. [9], Ahmet et al. [10], Topcu and Saridemir [11] etc.

Maier and Dandy [5] reviewed 43 papers dealing with the use of neural network models for the prediction and forecasting of water resources variables in terms of the modelling process adopted. They identified inadequate model building as the obstacle militating against accurate predictions using artificial networks. They suggested that ANN models must be properly evaluated before its application in time series analysis.

Their assertion is corroborated by Chatfield [12] when commenting on the suitability of ANNs for time series analysis and forecasting, who commented thus: "when the dust has settled, it is usually found that the new technique is neither a miraculous cure-all nor a complete disaster, but rather an addition to the analyst's toolkit which works well in some situations and not in others".

It is important to note that a neural network modelling is purely a computational technique. Hence, if one wants to explain an underlying process or mathematical framework that produces the relationships between the dependent and independent variables, it would be better to use a more traditional statistical model like regression analysis. However, if model interpretability is not important, one can often obtain good model results more quickly using a neural network.

Properties of materials used in construction vary from region to region and from country to country. Hence, accordingly, the properties of building materials used in Nigeria are unique and differ significantly with what is obtained in other countries. Here we examined one major coarse aggregate component of concrete used as construction material in eastern Nigeria. This coarse aggregate is unwashed local gravel.

Concrete is a four component mix of water, cement, fine aggregate and coarse aggregate, of which the important properties are strength (compressive and flexural), deformation under load, durability, permeability and shrinkage. But strength, being considered the most important of these properties determines the quality of the concrete. Neural network approach was used to predict the flexural strength of concrete materials produced from this coarse aggregate component (granite). Flexural strength prediction of concrete is necessary in structural design of buildings and structures [1,

2]. The neural network model developed has intuitive and theoretical appeal. It was developed based on the assumption that the experimental results were generated by a stochastic process. The model developed was in very good agreement with values obtained from experiment and the theoretical model based on Scheffe's (4, 2) regression equations [13, 14].

**2.0 Experimental Technique and Regression Methodology**

The materials for the mixing and production of concrete were obtained, prepared, and the concrete produced tested. The test results were used to determine the coefficients of the regression model. The material preparation and testing procedure, as well as the regression model development are hereby presented.

**3.0 Preparation, Curing and Testing of Cube Samples**

The aggregates were sampled in accordance with the methods prescribed in British Standards Institution [15]. The test sieves were selected according to British Standards Institution [16]. The water absorption, the apparent specific gravity and the bulk density of the coarse aggregates were determined following procedures prescribed in [17]. The Los Angeles abrasion test was carried out in accordance with American Society for Testing and Materials [18]. The sieve analysis of the fine and coarse aggregate samples was done in accordance with British Standard Institution [19] and satisfied British Standard Institution [20]. The sieving was performed by a sieve shaker. The water used in preparing the experimental samples satisfied the conditions prescribed in British Standard Institution [21]. These specimens were cured for 28 days in accordance with British Standard Institution [22]. The testing was done in accordance with British Standard Institution [23] using flexural testing machine.

**4.0 Regression Model Development Methodology**

The experimental results were fitted to a polynomial regression model based on Scheffe's (4, 2) regression model [13, 14]. The regression model is:

For granite:

$$Y = 4.28x_1 + 4.42x_2 + 3.4x_3 + 2.71x_4 + 0.2x_1x_2 - 0.04x_1x_3 - 0.14x_1x_4 - 0.08x_2x_3 - 0.3x_2x_4 + 1.22x_3x_4 \quad (1)$$

The regression model assumed that each of the components of concrete namely: water, cement, fine aggregate and coarse aggregate could be zero or one. But in reality none of these components could be zero or one. Hence, an appropriate transformation of the actual components  $z_1, z_2, z_3$  and  $z_4$  was used to determine the pseudo components  $x_1, x_2, x_3$  and  $x_4$  that was used in the regression equations above [13, 14].

**5.0 Neural Networks**

As has been previously mentioned, the origin of artificial neurons (ANNs) is based on the work of McCulloch and Pitts in 1943 [4]. Artificial neurons are building blocks for artificial neural networks. We shall discuss here the structure artificial neurons and neural network used in this research.

**6.0 Artificial Neurons**

Artificial neural networks make use of artificial neurons. Artificial neural networks (ANNs) simulate the manner of operation of natural neurons in the human body. The basic unit of operation of an ANN is the neuron shown in Figure 1.

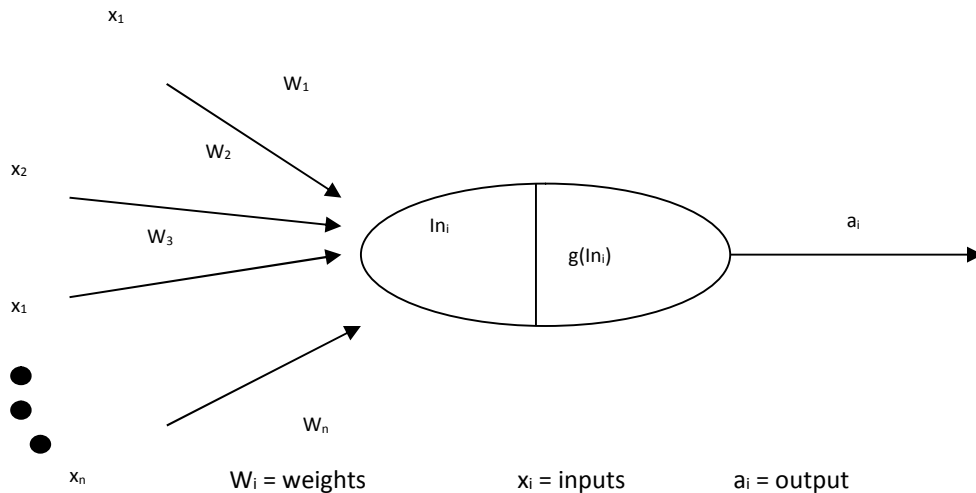


Figure 1: An artificial neuron

In a typical neuron shown in Figure 1, the input to the neuron  $x_i$  is multiplied by a weighting function  $W_i$  to generate the transformed input  $W_i x_i$ . The transformed inputs are summed to obtain the summed input. The summed input constitutes the variables to the activation/transfer function,  $g$ , which generates the output  $a_i$ . The output of the transfer function is compared to a threshold value. If the output is greater than the threshold value, the neuron is activated and signal is transferred to the neuron output, alternatively, if it is less the signal is blocked.

Given an input vector  $X = (x_1, x_2, \dots, x_n)$ , the activations of the input units are set to

$(a_1, a_2, \dots, a_n) = (x_1, x_2, \dots, x_n)$  and the network computes to:

$$In_i = \sum_{j=1}^n W_{j,i} a_j \tag{2}$$

$$a_i = g(In_i) \tag{3}$$


The transfer function could be a threshold transfer function, a sin function, a sigmoid function, hyperbolic tangent function etc. Differentiable transfer functions are preferred. Similarly, non linear transfer functions perform better than linear transfer function. Bearing these in mind, in this particular application we chose the sigmoid function. The sigmoid activation function which is given by the equation:

$$a_i = g(In_i) = \frac{1}{1 + e^{-In_i}} \tag{4}$$

Training the network (learning) could be supervised or unsupervised training. In supervised training, the network is provided with the inputs and appropriate outputs; hence the network is trained with a set of examples in a specified manner. In unsupervised/adaptive learning, the network is provided with inputs but not the outputs. In this present application, we used the supervised learning, hence, the appropriate network architecture is the feed forward architecture.

### 7.0 The Feed forward Network Architecture

As has been mentioned, the developed neural network models are feed forward multilayer perceptron networks (MLP). The hidden units as previously noted use the sigmoid activation function. The network model is shown in Figure 2.

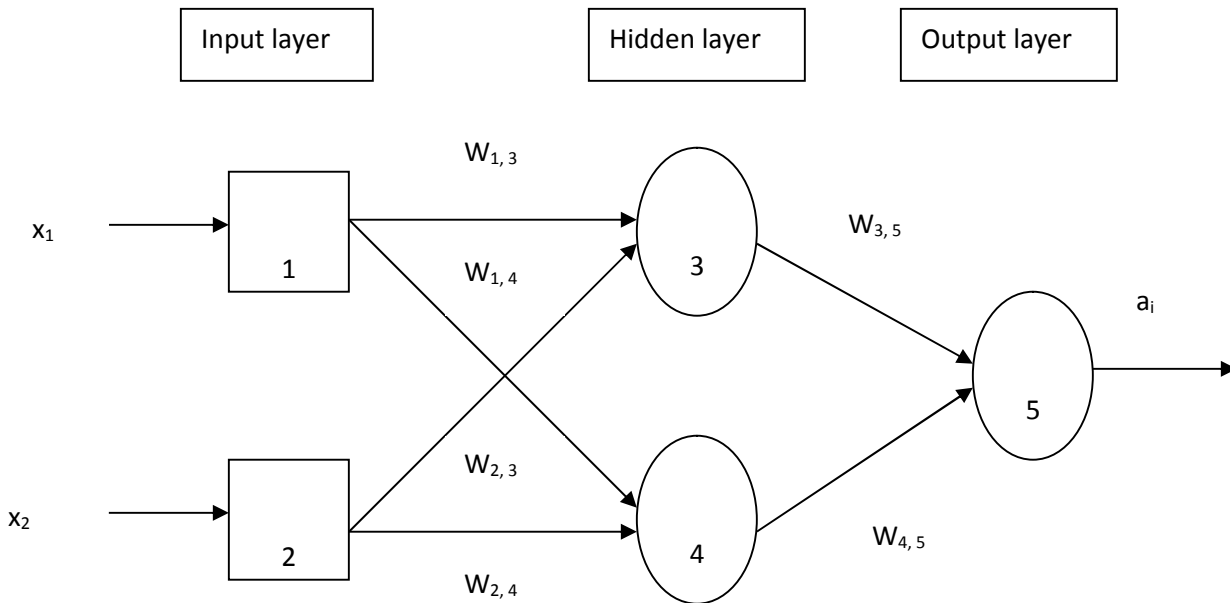

**Figure 2:** Two-input feed forward neural network model

In the feed forward network shown in Figure 2, the output of the network is compared with the desired output. The difference between the output and the desired output is known as the error,  $E$ . ANNs learn by trying to minimize this error. The learning process uses optimisation algorithms such as Levenberg-Marquardt algorithm, gradient descent algorithm, genetic algorithm

or some other natural optimisation algorithm [3, 24]. These algorithms work by adjusting the weights,  $W_i$ , such that the error,  $E$ , is minimized. Hence, the learning process uses the sum of squares error criterion  $E$  to measure the effectiveness of the learning algorithm [3].

$$E = \frac{1}{2} \text{Err}^2 \equiv \frac{1}{2} (y - h_W(x))^2 \tag{5}$$

Here


$y = Y =$  the true/experimental value

$$\hat{Y} = h_W(x) \tag{6}$$

$h_W(x)$  is the output of the perceptron.

### 8.0 The ANN for Predicting Flexural Strength of Concrete

Recall that our application is for concrete strength prediction, and we used supervised learning. Hence, Seventy five (75%) percent of the data was used for training, while twenty five (25%) percent was used for testing and validation. The number of epoch was set to 1000.

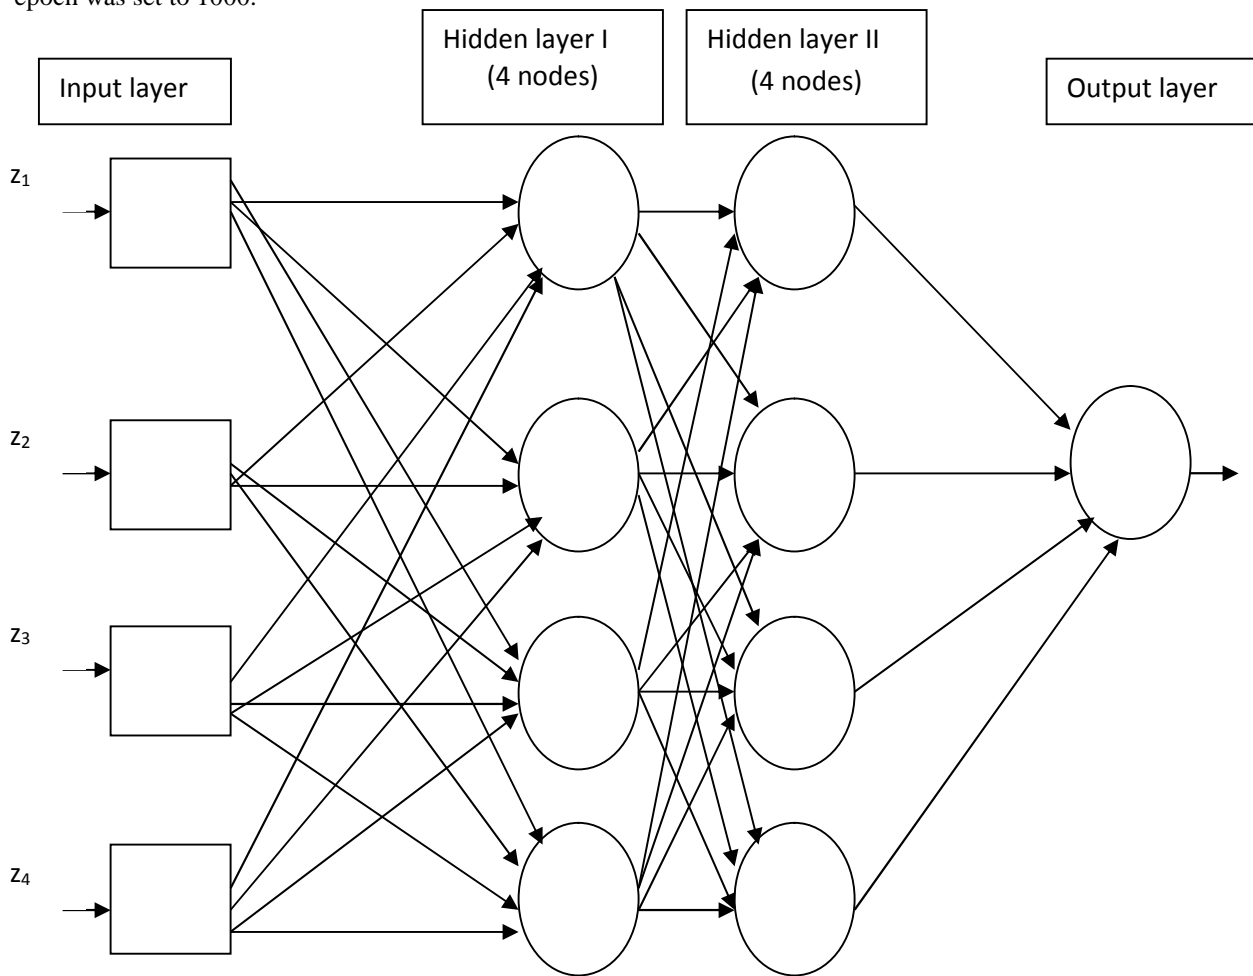

**Figure 3:** The Four-input, 4 layers feed foreword neural network model

The epoch was set to 1000 not for any theoretical reasons but to ensure that there is sufficient number of iterations during the learning process. Also learning was fast at this level and the optimum performance was obtained in all cases when the epoch was less than 50. The ANN training was done using Levenberg-Marquardt algorithm which performed better than others.

Single network architecture was used in the study. The network architecture consists of four input units, two hidden layers with four hidden units (nodes) and one output unit. This structure performed better than other configurations that we tested. The network structure is shown in Figure 3. The inputs  $Z_1, Z_2, Z_3$  and  $Z_4$  to the neural network consists of water/cement ratio, cement, fine aggregate and coarse aggregate respectively.

**9.0 Results**

Table 1 shows the experimentally determined strength for different mixture ratios for granite-concrete mixtures represented by Y.

**Table 1:** Results of flexural strengths obtained experimentally

Sample No	Y	Z <sub>1</sub>	Z <sub>2</sub>	Z <sub>3</sub>	Z <sub>4</sub>
1	4.28	0.6	1	1.5	2
2	4.42	0.5	1	1	2
3	3.4	0.55	1	2	5
4	2.71	0.65	1	3	6
5	4.4	0.55	1	1.25	2
6	3.85	0.575	1	1.75	3.5
7	3.46	0.625	1	2.25	4
8	3.89	0.525	1	1.5	3.5
9	3.49	0.575	1	2	4
10	3.36	0.6	1	2.5	5.5
11	4.21	0.5625	1	1.5	2.75
12	3.6	0.6	1	2	3.75
13	3.87	0.55	1	1.75	3.75
14	3.83	0.575	1	1.875	3.75
15	4.33	0.575	1	1.375	2
16	3.9	0.5875	1	1.625	2.75
17	3.87	0.6125	1	1.875	3
18	4.4	0.5125	1	1.25	2.75
19	3.9	0.5375	1	1.5	3
20	3.44	0.585	1	2.25	5.25

**Table 2:** Physical and mechanical properties of the granite

PROPERTIES	GRANITE
Water absorption	2.7 %
Moisture content	44.2 %
Apparent specific gravity	2.26
Los Angeles abrasion	22 %
Impact resistance	9.15%
Bulk density	2072.4 Kg/m <sup>3</sup>
Fineness modulus	4.89

**10.0 Physical and Mechanical Properties of Aggregates**

Sieve analyses of both the fine and coarse aggregates were performed and the grading curves are shown in Figures 4 and 5. These grading curves showed the particle size distribution of the aggregates. The physical and mechanical properties are summarized in Table 2.

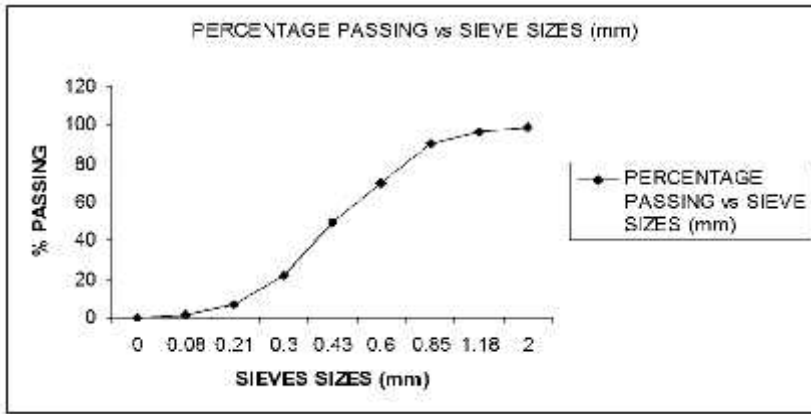


Figure 4: Grading curve for the fine aggregate

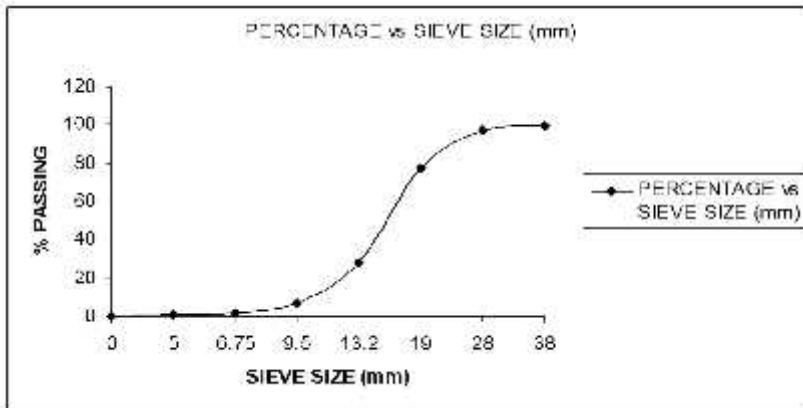


Figure 5: Grading curve for granite

### 11.0 ANN Prediction Results

The results of the experimentally determined concrete strength, analytically determined strength using the regression model, and the strength prediction using neural network models are presented in this section.

As Table 1 indicated, the strengths (responses) of washed-gravel concrete were a function of the proportions of its ingredients: water, cement, fine aggregate, and coarse aggregates. As shown in Figure 6, correlation coefficient of ANN predictions is 0.98364. The correlation coefficient of regression model predictions is 0.92687 as shown in Table 3. The experimental values were in very good agreement with theoretical values obtained from the Scheffes's regression model and the neural network model. Table 3 shows the comparison of the regression and neural network models.

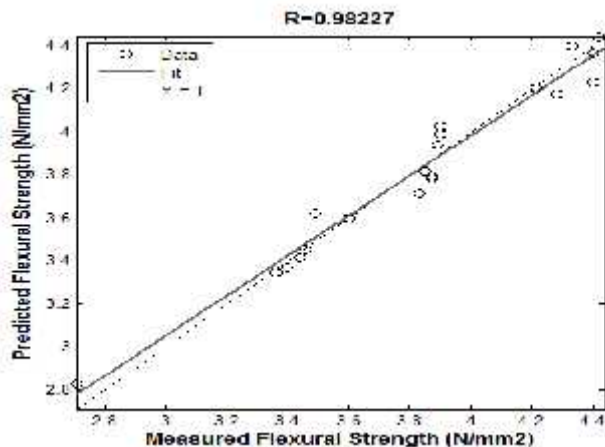


Figure 6: Comparison of ANN predictions with experimental results (granite)

**Table 3:** Comparison of ANN and regression models

Description	Sum of Squares Error	Correlation Coefficient R
Regression Model	0.133534	0.98222
Neural network model	0.010914	0.98227

## 12.0 Discussion

From the analysis in this work we have seen that the strength of concrete materials depends on the proportion of its ingredients: water, cement, fine aggregate, and coarse aggregates. Figure 7 shows the plot of the artificial neural network predictions for the washed gravel concrete. Generally, the predictions are in good agreement with the experimentally determined flexural strength. Table 3 shows that for the washed gravel based concrete the regression model prediction has a sum of squares error of 0.133534 and a correlation coefficient of 0.98222. Similarly, for the washed gravel based concrete the neural network model prediction has a sum of squares error of 0.010914 and a correlation coefficient of 0.98227.

Generally, the neural network models were bereft of the messy mathematics and statistical analysis required in building the regression model, while at the same time giving good model predictions. Hence, would be preferable when the underlying mathematical structure behind the model predictions is irrelevant to the modeller/analyst, and model building is required quickly.

Concrete flexural strength determination is very important in civil engineering and in the construction industry [1, 7]. It is obvious that neural network models will help in efficient and accurate determination of concrete strength for building and construction purposes using local materials obtained from Nigeria.

## 13.0 Conclusion

The construction industry is a major component of the economy of any nation. Building and structures are indispensable in any modern society. Concrete is the primary building material in Nigeria. As noted by Olajumoke et al. [1] and Arum [2], cases of collapsed building and structures is endemic in Nigeria. These have resulted in loss of lives and properties, in addition to these, the economy is impacted negatively [1, 2]. Often poor concrete mixtures and inadequate knowledge of the role of concrete mixture properties to its strength are to blame [1, 25, 26, 27, 28].

Computational models using neural networks offer a very promising solution to the problem of concrete strength prediction. As we have demonstrated in this application, artificial neural network method for the prediction of flexural strength of concrete from local materials in Nigeria compares favourably with an equivalent mathematical model based on regression analysis. Computational models are simple because it does not involve complex mathematical analysis. Hence, what the engineer needs is good and reliable computer software and a matching hardware to do his analysis. The ubiquity of various computing platforms ranging from desktop PCs, laptops, palmtops, tablets etc means that such analysis is made even easier. The present application was done using a computer laptop which ran the artificial neural network software.

If the recommendations of this research are implemented by adopting this novel concrete strength prediction aid and making sure construction engineers and technicians stick to it. There will be resultant reduction in cases of collapsed buildings and structures in Nigeria. This will have a very positive effect on the socio-economic situation of the country which has been declining over the years. The same applies to other countries that are in similar situation as Nigeria.

Finally, neural network models for other common materials used in construction in Nigeria should be developed by engineers and scientists. This will further boost the quality of our building constructions.

## 14.0 References

- [1] A.M. Olajumoke, I.A. Oke, A.B. Fajobi and M.O. Ogedengbe. Engineering Failure Analysis of a Failed Building in Osun State, Nigeria. *Journal of Failure Analysis and Prevention*, 9(1):8-15, 2009.
- [2] C. Arum. Verification of Properties of Concrete Reinforcement Bars: Nigeria as a Case Study. *Indoor and Built Environment*, 17(4):370-376, 2008.
- [3] S.J. Russell and P. Norvig. *Artificial Intelligence: a modern approach*. Pearson Educational Inc., Upper Saddle River, New Jersey, USA, 2003.
- [4] W.S. McCulloch, W.Pitts. A logical calculus of the ideas imminent in nervous activity. *Bulletin and Mathematical Biophysics* 5, (1943)115–133.



- [5] H. R. Maier and G. C. Dandy. Neural networks for the prediction and forecasting of water resources variables: a review of modelling issues and applications. *Environmental Modelling & Software* 15 (2000):101–124.
- [6] A. Mukherjee and S.N. Biswas. Artificial neural networks in prediction of mechanical behavior of concrete at high temperature, *Nuclear Engineering and Design*, 178(1):1–11, 1997.
- [7] A.W.C. Oretal and K. Kawashima. Neural Network Modeling of Confined Flexural Strength and Strain of Circular Concrete Columns. *Journal of Structural Engineering*, 129 (4): 554–561, 2003.
- [8] S.C. Lee, Prediction of concrete strength using artificial neural network, *Eng. Structures*, 25(3):849-857, 2003.
- [9] J.Kasperkiewicz, J. Racz and A. Dubrawski. HPC strength prediction using artificial neural network, *J. Comput. Civ. Eng.*9(4):2799-284, 1995.
- [10] O.Ahmet, P. Murat, O. Erdogan, K. Erdogan, C. Naci and M.A. Bhatti. Predicting the flexural strength and slump high strength concrete using artificial neural network, *Constructions and Building Materials*,20(9):769-775, 2006.
- [11] I. Topcu and M. Saridemir, Predicting of flexural strength of concrete containing fly ash using artificial neural networks and fuzzy logic, *Computational Material Science*,41(3):305-311, 2008.
- [12] C. Chatfield. Neural networks: Forecasting breakthrough or just a passing fad? *International Journal of Forecasting* 9, (1993) 1–3.
- [13] H. Scheffe. Experiment with Mixtures. *Royal Statistical Society Journal, Series B*, 20 (1958): 340-360.
- [14] I. E. Umeonyiagu, Mathematical models for the prediction of the concrete strength characteristics of concrete with coarse aggregates of variable sources, PhD Thesis, Nnamdi Azikiwe University, Awka, Nigeria, 2012.
- [15] BS 882. Sampling, shape, size and classification. Methods for sampling and testing of mineral aggregates, sands and fillers. British Standard Institution, London, 1992.
- [16] BS 410. Specification for test sieves. British Standard Institution, London, 1986.
- [17] BS 882, Specification for aggregates from natural sources for concrete. British Standard Institution, London, 1992.
- [18] BS 1881, Part 111. Method for normal curing of specimen (20 °C). British Standard Institution, London, 1983.
- [19] BS 1881, Part 116. Methods for Determination of Flexural Strength of Concrete Cubes. British Standard Institution, London, 1983.
- [20] BS 3148, Tests for water for making concrete. British Standard Institution, London, 1980.

- [21] ASTM Standard C 131. Tests For Resistance to Abrasion of Small Size Coarse Aggregate by Use of the Los Angeles Machine. American Society for Testing and Materials, 1976.
- [22] BS 812, Part 1: Sampling, shape, size and classification. Methods for sampling and testing of mineral aggregates, sands and fillers. Physical properties. British Standard Institution, London, 1975.
- [23] BS 812, Part 2: Methods for sampling and testing of mineral aggregates, sands and fillers. Physical properties. British Standard Institution, London, 1975.
- [24] R.L. Haupt and S.E. Haupt, Practical Genetic Algorithms, John Wiley & Sons, Inc., Hoboken, New Jersey, USA, 2004.
- [25] C.U. Atuanya, M.R. Government, C.C. Nwobi-Okoye, O.D. Onukwuli. Predicting the Mechanical Properties of Date Palm Wood Fibre-Recycled Low Density Polyethylene Composite Using Artificial Neural Network, International Journal of Mechanical and Materials Engineering, 7(1):1-20, 2014.
- [26] I.E. Umeonyiagu and C.C. Nwobi-Okoye. Predicting the Compressive Strength of Concretes Made with Washed Gravel from Eastern Nigeria Using Artificial Neural Networks. Journal of the Nigerian Association of Mathematical Physics, 23:559-558, 2013.
- [27] C.C. Nwobi-Okoye and I.E. Umeonyiagu. Predicting the Compressive Strength of Concretes Made with Unwashed Gravel from Eastern Nigeria Using Artificial Neural Networks. Nigerian Journal of Technological Research, 8(2):22-29, 2013
- [28] C.C. Nwobi-Okoye, I.E. Umeonyiagu and C.G. Nwankwo. Predicting the Compressive Strength of Concretes Made with Granite from Eastern Nigeria Using Artificial Neural Networks. Nigerian Journal of Technology (NIJOTECH), 32 (1):13-21, 2013.